

# Energy Efficient Prioritized Multipath QoS Routing Over WMSN

Jayashree A  
PDA College of Engg.  
Asst. Professor  
Computer Science & Engg.  
Dept.

G. S. Biradar  
PDA College of Engg.  
Professor  
E&CE Dept.

V. D. Mytri  
Shetty Institute of Technology  
Principal  
E&CE Dept.

## ABSTRACT

In recent years most of the applications of WSNs are supported with array of image/video sensors to enhance the performance. Multiple coexisting cameras deployed can provide different views of the same area or target which enhances the view of scene of interest. The redundancy introduced by multiple, possibly heterogeneous, overlapped sensors can provide enhanced understanding and monitoring of the environment. But individual transmission of these images of same scene of interest from multiple coexisting cameras unnecessarily consumes energy and degraded image quality. Hence to overcome this problem we proposed a protocol “Energy Efficient Prioritized Multipath QoS Routing (EPMQR)” which optimally transmits image over wireless sensor network. Multiple paths are built first and then are scored using path conditions based on availability of resources such as free buffer size, energy, hop-count and packet loss along the paths. The proposed scheme is compared with non-optimal scheme which doesn’t calculate the non-overlapping regions and overlapping regions of the original images. Simulation results have demonstrated the effectiveness of the proposed scheme in terms of better image quality and less packet loss across the image region compared to non-optimal scheme using various metrics.

## General Terms

Wireless Sensor Network, Multimedia Communication, Collaborative Transmission.

## Keywords

Multipath routing, prioritized region scheduling, multimedia data, QoS routing, reliability, Wireless multimedia sensor network.

## 1. INTRODUCTION

Technological advances in the micro-electronics and wireless communications, in addition to availability of cheap CMOS cameras and micro phones, have led to emergence of next generation networks known as Wireless Multimedia Sensor Networks (WMSNs) which can retrieve image, video, audio and scalar sensor data from the physical environment. Many of the applications such as environmental monitoring, surveillances, habitat monitoring applications, use of image/video sensors in WSN can improve the performance. The Field of View (FoV) of a single fixed camera or the Field of Regard (FoR) of a single moving pan-tilt-zoom (PTZ) camera is limited. Many Sensor applications such as monitoring and Surveillance may require image sensor array to conduct collaborative image transmissions in WSN. As observed in [4], WMSNs will stretch the horizon of traditional monitoring and surveillance systems by a distributed system

of multiple cameras and sensors enables perception of the environment from multiple disparate viewpoints, and helps overcoming occlusion effects. But huge volume of image data may cross the limits of limited resources of WSN which may shorten network lifetime and degrades the performance [1-2]. Many of these applications require mechanisms to deliver multimedia content such as image or video data with a certain level of Quality of Service (QoS). Provisioning sufficient bandwidth and low packet loss rate, while considering energy efficiency, are the main QoS requirements of multimedia data transmission over WMSN. Several features of WMSN such as: resource constraints, unbalanced traffic, and variable channel capacity etc. make provisioning these requirements as a hard problem. This has necessitated providing an efficient way to transmit the image to the receiver while considering energy and bandwidth focusing on features of WMSN. In an application involving images, the important parameters to consider may include a minimum image resolution and size of the data. The routing protocols must provide an optimal data transmission route from sensor nodes to sink to save energy of nodes in the network while achieving application specific QoS. Good surveys of routing techniques are well discussed in [3]. In order to deliver a high quality image to sink can be achieved by utilizing prioritization of packets of images and sending them on the more reliable path. In most of the application array of image sensors are deployed and sensed images from these image sensors may overlap with each other consisting of lots of data redundancy. Transmission of such types of images individually may consume more resource such as energy, buffer, bandwidth etc. along the path to reach the sink. The drastic drain of energy for the image transmission results into packet losses which may decrease quality of image recovered at the sink. Hence efficient multimedia routing becomes very challenging problem in WSN. It is found in the literature that single path routing is not an efficient way for transmitting multimedia over WMSN as it will cause queuing delay and packet loss in restricted buffers at intermediate nodes and may cause congestion over the network. These problems enforce to use Multipath routing that can provide high end to end bandwidth in WMSNs. Comparing with single path routing, utilizing multiple paths in multimedia transmission will benefit in reducing end to end delay, energy conservation of the node, load balancing etc. Our approach is to select multiple paths based on path conditions and transmit the redundant information acquired from multiple cameras only once.

The rest of the paper is organized as follows. In section 2 literature works relating to Multipath routing in various networks like WSNs, Ad-hoc networks and WMSNs is reviewed. Section 3 discusses the technique proposed and

design of system for the proposed protocol. Section 4 describes simulation environment and performance analysis with graphs obtained. Finally, section 5 summarizes the conclusion drawn and shows the direction for future work

## **2. RELATED WORK**

Routing in WMSN is more challenging task because not only the scarcity of the resources of the WSN but also it should consider unique characteristic of multimedia data. Most of the earlier protocols were based on single path routing which constructs a single energy-efficient path between a source and a destination node. In [5], authors described that single path are not suitable for supporting multimedia transmission in WSN. Performance of data transmission gets enhanced with efficiently with the use of Multipath protocols in WMSN than the single path routing protocols. The key challenge is to find effective approach to establish multiple paths which provides reliability, balances the load among multiple paths and thus increase the network lifetime. There are numerous multi path routing protocols presented in the literature of adhoc network, WSN and WMSN. In [6], authors described AOMDV which shares several characteristics of AODV. The core of the AOMDV protocol lies in ensuring that multiple paths discovered are loop-free and disjoint, and in efficiently finding such paths using a flood-based route discovery. In [7], authors proposed multipath routing protocol for network lifetime maximization in ad-hoc networks which is based on AOMDV. Here the protocol sets energy threshold to optimize the forwarding mechanism. It builds energy cost function and uses the function as the criterion multiple path selection. But this protocol does not consider end to end delay. In [8], authors proposed an energy efficient adaptive multipath routing technique which utilizes multiple paths to provide a reliable transmission environment with low energy consumption, by efficiently utilizing the energy availability and the received signal strength of the nodes. In [9], authors proposed a Robust Energy Efficient Multipath routing protocol (REER) which uses the residual energy, available buffer size, and Signal-to- Noise Ratio (SNR) to predict the best next hop through the paths construction phase. REER examines two methods of traffic allocation: REER uses the alternative path if the path cost of the path chosen from the discovered paths falls below a threshold in the first method. The second method splits the transmitted message into number of segments of equal size and then transmits it across multiple paths simultaneously to increase the probability that an essential portion of the packet is received at the destination without incurring excessive delay. In [10], authors designed novel QoS aware routing protocol which works in a distributed manner to support high data rate for WMSN. The routing decision is made according to the dynamic adjustment of the required bandwidth and path length based proportional delay differentiation for real time data. In [11], authors presented multi-path transmission of video using packet and path priority scheduling over WMSN. Here the objective is to provide a transmission mechanism to improve the video quality perceived at the receiver while considering energy, bandwidth and delay constraints of the network. The network-adaptive transmission mechanism is proposed in [12] that decompose the source bit stream into segments of unequal importance and reserves the most reliable paths to transmit the segments with the highest importance. Moreover, unequal segment loss protection with erasure codes of different strengths is used to maximize the expected quality at the destination and propose a fast algorithm that finds nearly optimal transmission strategies.

Finding the exact object location is one of such traditional problems which have been well studied in the past. Authors in [13] proposed an object localization scheme for WMSNs which can be run on a single camera sensor by only using the sensor's location information. First it extracts the detected object using frame differencing. To reduce the processing cost of this operation, each frame size is reduced with some video pre-processing. The location of the object can then be estimated using the distance of the object to the camera and camera/frame size properties. In addition to being energy-efficient, since a single camera sensor is involved, the required time for localization is reduced immensely as opposed to approaches which involve multiple camera sensors. Authors in [14] present a vision-based solution to the problem of topology discovery and localization of WSNs. In this proposed model, a robot controlled by the network is introduced to assist with localization of a network of image sensors, which are assumed to have image planes parallel to the agent's motion plane. The localization algorithm for the scenario where the moving agent has knowledge of its global coordinates is first studied. This baseline scenario is then used to build more complex localization algorithms in which the robot has no knowledge of its global positions. Two cases where the sensors have overlapping and non-overlapping fields of view (FOVs) are investigated. In order to implement the discovery algorithms for these two different cases, a forest structure is introduced to represent the topology of the network. The collection of sensors with overlapping FOVs as a tree in the forest is considered. The robot searches for nodes in each tree through boundary patrolling, while it searches for other trees by a radial pattern motion.

In [15], authors proposed a collaborative transmission scheme for image sensors to utilize inter-sensor correlations to decide transmission patterns based on transmission path diversities, which achieves minimal energy consumption, balanced sensor lifetime and required image quality. This optimization scheme not only allows each image sensor to transmit optimal fractions of the overlapped images through appropriate transmission paths in energy-efficient way, but also provides unequal protection on the overlap image regions through path selections and resource allocations to achieve good transmission image quality. In [16], authors proposed an effective approach where the data redundancy among correlated image sensors can be considerably reduced. The communication overhead for data exchange is relatively small to exploit the correlations in the proposed approach. Furthermore, it is investigated and considered both source sensor image transmission schemes and routing patterns together in WSN assuming that image sensors are installed in various locations of a large size sensor network to monitor or track objects. These sensed images may overlap with each other. The sensors have limited capability and resource to process the images; therefore, images have to be sent to base station (sink) for more sophisticated processing. To save communication energy, it would be important for each source sensor to send its own Non-overlapping region (NOVR) and not to send the overlapping region. As the base station may be far away from the image sensor, the images then have to be transmitted by multiple hops through relay sensors to the base station. It requires an effective image transmission pattern, to handle large-size image data. Further this uses MLRR routing scheme achieving energy efficiency and longer network lifetime, based on residual energy level at each of the nodes rates are determined at each of the node. It will choose the next hop node in next level whose rate is same as that of its.

So that lower transmission rate is assigned to nodes which have less residual energy.

The proposed protocol “Energy Efficient Prioritized Multipath QoS Routing (EPMQR)” finds OVR and NOVR as presented in [16] to exploit the redundancies among the correlated large size images from image sensors falling in same FOV to reduce the volume of data actually be sent to the destination. And then it uses Multipath routing scheme which considers not only the residual energy at nodes but also buffer size and hop count to get increased throughput. We use prioritized region scheduling to get improved image quality, higher packet delivery and hence throughput with minimum packet loss. In [16] only energy efficiency was the main concern. The path with the highest score has the best condition for transmitting high priority packets is used to send OVR. This causes more important packets to be transmitted through more reliable paths and therefore it could increase image quality at the receiver.

### 3. PROPOSED TECHNIQUE

#### 3.1 Working Scheme

The proposed protocol “Energy Efficient Prioritized Multipath QoS Routing (EPMQR)” uses Multipath based approach to transmit image over WSN. In order to build multiple paths we have considered features of AOMDV [6]. We consider a camera based WSN where image data is to be sent to sink from source node. Source node can be an aggregation node that collects the data from the multiple image sensors. The image sensors are installed in various locations of a large size sensor network to monitor a scene of interest or track objects. These sensed images may overlap with each other and have some regions in common (overlapped) and some are not (non-overlapping). So image is separated into overlapping and non-overlapping region of original image. We use an approach to classify each image such that image1 consists of OVR, NOVR1 and OVR and NOVR2 belongs to image2. OVR of both the images have the redundant information and hence can be transmitted only once to reduce energy consumption and also is the important region because the two original images can only be recovered by the reliable reception of this OVR at the sink. We use prioritized region scheduling. When the correlated images among cameras considered, after classification of image into OVR and NOVR not all the packets in all the regions have the same effect on the image quality, so it is better to give priority to packets belonging to OVR because these packets are most important to reconstruct the images as they carry information of both the images and loss of such packet degrades the picture quality and hence a most reliable path is searched among the multipaths to send the OVR packets. The data is scheduled for transmission through multiple paths according to the path scores. Multiple path scores are calculated by considering the hop count, minimum residual energy, and minimum buffer size. The data is transmitted through highest path score paths. The optimal scheme provides high throughput and low packet loss. The proposed protocol being an optimal scheme calculates OVR and NOVR of the images captured from same scene of interest, so that transmission of redundant data is reduced. These classified data is transmitted from source to sink with low energy consumption through multiple paths which can considerably reduce the total energy consumption and extend the network lifetime for WSN

### 3.2 Equations

#### • Path Score Calculation

In [18-19] authors have proposed a mechanism for achieving most reliable path. The path with the highest score has the best condition for transmission of important packets and path score is calculated as follows:

$$\text{Path score} = \alpha \times WE + \beta \times WQ + \gamma \times WH \quad (1)$$

$$\text{Where, } \alpha + \beta + \gamma = 1 \quad 0 \leq \text{path score} \leq 1$$

$$WE = \min E_{\text{res}} \text{ in the path} / E_0,$$

$$WQ = \min \text{ABS in the path} / B_0,$$

$$WH = (1 + \max \text{hop count} - \text{hop count}) / \max \text{hop count},$$

Where,  $B_0$  is the initial buffer size of the intermediate node and Hop count is the number of hops traversed by a packet all over the network to reach the sink.

#### • Energy model

We adopted the energy model of [17] for communication.

- The consumed energy for transmission of a n-bit message is given by,  

$$ET = n * E_{\text{elec}} + n * E_{\text{amp}} * r^2 \quad (2)$$

- To receive a n-bit message, a sensor consumes the energy  

$$ER = n * E_{\text{elec}} \quad (3)$$

Where,  $E_{\text{elec}}$  is the energy consumed in the nodes electronic apparatus,

$E_{\text{amp}}$  is the energy requirements for the signal amplification,

‘ $r$ ’ is the distance between the transmitting and receiving node.

- Residual energy ‘ $E_{\text{res}}$ ’ of each node is computed based on:  

$$E_{\text{res}} = E_0 - ER - ET \quad (4)$$

Where,  $E_0$  is the initial energy of the node,  $ER$ =energy consumption for receiving n-byte,

$ET$ =energy consumption for transmitting n-byte,

- The count of available buffer space ‘ $ABS$ ’ of each node is computed based on  

$$ABS = BS - j \quad (5)$$

Where, Buffer size ‘ $BS$ ’ is maximum capacity of the buffer to store the packets and ‘ $j$ ’ is a counter that shows the number of packets in each intermediate node buffer.

### 3.3 Algorithm

The proposed protocol “Energy Efficient Prioritized Multipath QoS Routing (EPMQR)” works as follows.

**Step1:** Image sensors (IS) are randomly selected from the array of sensors deployed. Calculate overlapping and non overlapping region of the images captured from the image sensors.

**Step 2:** In Path Discovery phase, the source will find the number of valid multiple node disjoint paths that are calculated based on minimum hop count towards forwarding nodes from source sensor to sink. Each IS sends RREQ to find neighbor nodes of IS until it reaches sink. From IS it finds all available paths based on maximum hop count which is considered as two more than the network size ( $N+2$ ). From all available paths find valid paths based on minimum hop.

**Step 3:** A method is used to score the paths according to their properties and QoS requirements of multimedia applications. We used control packets for collecting path conditions periodically. Score mechanism is on following metrics: free buffer size, residual energy, and hop count. Paths that have better conditions get higher scores using the equations (1-5).

**Step 4:** The multipaths are sorted based on their path score and stored in valid path list.

**Step 5:** Once the multiple paths are found, data is transmitted towards sink over three selected paths simultaneously. We are using prioritized region scheduling to avoid fast depletion of energy in the sensor nodes. i.e the OVR is sent on the first highest path score path and then NOVRs of two images are sent on the other two paths which are selected among all valid paths. The path with the highest score is considered as the most reliable and packets that have higher priority can be sent on these paths to improve the image quality at the sink.

**Step 5.1:** Select first three highest path scored paths.

**Step 5.2:** Assign first highest path for transmission of important OVR packets of the images.

**Step5.3:** Assign next two highest paths to NOVR of the two images.

**Step 6:** The images are reconstructed at the sink.

The proposed protocol is compared with non-optimal scheme where classification of packets is not performed. Here non-optimal scheme approach is that it transmits the images without calculating the OVR and NOVR of the original images that are captured and relevant paths are selected according to hop count for routing the image data to sink, then data obtained are compared with optimal scheme. The non-optimal scheme transmits the images on the relevant paths selected according to hop count. The packet loss, throughput, Peak Signal to noise ratio (PSNR), Packet Delivery Ratio (PDR) is evaluated.


## 4. SIMULATION AND PERFORMANCE ANALYSIS

We present and discuss in this section the simulation results for the performance study of proposed Multipath routing protocol along with sample outputs, parameters used for simulation, and performance analysis with the help of graphs obtained. The proposed scheme is implemented using Matlab [20-21] to simulate packet transmission over WSN. We simulate image transmission using optimal scheme and non-optimal scheme with path scheduling.

### 4.1 Simulation Environment

The Fig.1 shows network topology of the proposed scheme where  $N^2$  ( $N=7$ ) sensors are uniformly distributed over an area of  $1000 \times 1000 \text{ m}^2$ . We assume that the sensor nodes are

stationary for their lifetime. In addition, we assume that each sensor is able to compute its residual energy, available buffer size. The source sensor senses the image and stores in it, then the OVR and NOVR of the original image is calculated. This avoids data redundancy on multiple paths achieving load balance on the network. Quality scalable source encoders such as JPEG 2000 [22] can be used which offer flexibility in choosing the size of the information bit stream to be transmitted. In [23], authors proposed a system for JPEG-2000 with multiple descriptions coding of image and video data, image transmission over WSNs that minimizes energy consumption which is based on encoding the information bit stream using assumption while satisfying QoS guarantees. The input image is encoded using standard JPEG format. Both gray scale image and color images can be used. Although a JPEG file can be encoded in various ways, most commonly it is done with JFIF encoding .

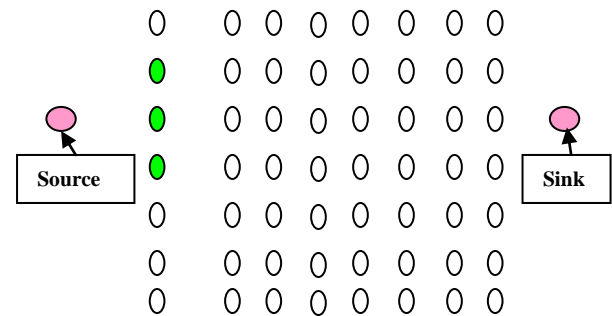

**Fig 1: Network Topology**

### 4.2 Simulation Settings

The simulation scenario was set up according to Table 1.

**Table 1. Simulation Parameters**

Parameter Name	value
Channel Type	Wireless channel
Radio-Propagation model	Propagation / Two Ray Ground
Network Dimension	$1000 \times 1000 \text{ m}^2$
Number of nodes	25 to 400
Sensor transmission range	50m
Sensor initial energy	10 joules
Node placement	Uniformly distributed

Traffic	One node sends image to the base station.
Buffer size	50 packets
Bandwidth	250kbps
Packet Size	1024bytes

### 4.3 Example Domain

It is found in the literature of WMSN, that they are used in Wildlife monitoring to study the behavior of animals by being programmed to detect and react in a proper way to pre-specified conditions, with almost no human intervention. The distributed structure of these systems allows deploying them to cover wide territories and to capture data from different modalities in response to events in real time, e.g., capturing image data only animals are active and by using motion sensors event can be generated to capture the image. WMSN are used in the forest where mammals lives in, the higher the number and diversity of species, body sizes and diet types. Some mammals seem more vulnerable to habitat loss than others: insect-eating mammals-like anteaters, armadillos and some primates are the first to disappear-while other groups, like herbivores, seem to be less sensitive. The results of the study are important in that they confirm what suspected: habitat destruction is slowly. For monitoring of endangered species hierarchical routing can be used. At the low level motion sensors can detect the motion and inform about the same to image sensors at the top level to take into part and send the images to the sink for necessary action.



Fig. 2: Original image1

Original image2

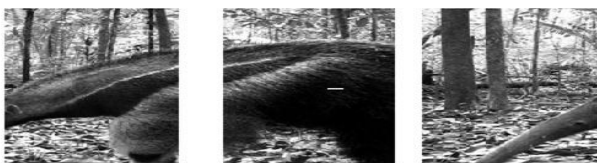


Fig. 3: NOVR1

OVR

NOVR2

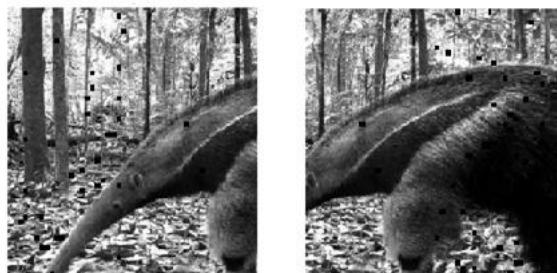


Fig. 4: Reconstructed imag1 and image2

The images shown Fig. 2 are of anteater are taken as input to source sensor and then OVR and NOVR are calculated, by comparing block of image1 with image2 if they are same, then it's considered as OVR of the images otherwise NOVR. The generated images are as shown Fig. 3 after the classification of the images. Fig. 4 shows the reconstructed images at the sink. The black dots in the images show the packet loss belonging to those regions.

### 4.4 Performance metrics

To evaluate the performance of the proposed protocol, the following performance metrics are used:

- **Packet loss:** Packet loss is the failure of one or more transmitted packets to arrive at their destination.
- **Throughput:** Throughput is the measure of number of packets passing through the network in a unit of time.
- **Packet Delivery Ratio (PDR):** It is defined as the ratio of number of packets sent by source to the number of packets received at the sink.
- **Peak Signal to Noise Ratio (PSNR):** The peak signal-to-noise ratio is the measure of required image quality and is usually expressed in decibels.

### 4.5 Simulation Results

In this section the performance of the proposed optimal routing scheme in wireless multimedia sensor network is compared with non-optimal scheme.

It is found that packet loss can be caused by a number of factors including signal degradation over the network medium, channel congestion, corrupted packets rejected in-transit, faulty networking hardware, faulty network drivers etc.. Fig. 5 shows packet loss in the proposed WMSN. Packet loss is more in case of optimal method when the network size is small due to the less number of non interfering available paths when compared to increasing network size. The packet loss is more in non-optimal scheme when compared with optimal scheme.

Fig. 6 shows Throughput as a function of Network size of the compared protocols. It shows that the throughput of optimal scheme is better than non-optimal scheme because packet loss is more in non-optimal when compared with proposed optimal scheme. As the network size increases performance degrades in non-optimal scheme as it is not considering the path conditions as well as unnecessarily more number of packets are sent which consumes more energy.


Fig.7 shows PDR versus network Size. As the network gets large, there are more available nodes and hence more routes to forward data. The proposed scheme outperforms Non-optimal schemes in packet delivery capability. This is due to the selection of multiple paths. As the packet drops are less in optimal scheme resulting into an increase in the packet delivery ratio.

Fig. 8 shows PSNR versus Region count. This figure is used to analyze the image quality. A higher PSNR would normally indicate that the reconstruction of the image is of higher quality. Here the region count gives different regions like: overlapping region, non-overlapping region1, and non-overlapping region2 of the sample images considered. The Fig.8 shows better PSNR in optimal scheme compared to non-




optimal scheme, thus image quality is good in optimal than non-optimal scheme


Fig. 9 shows packet losses of different regions of image such as non overlapping regions and overlapping region are taken into consideration and this shows that non optimal scheme experiences more packet loss than optimal.

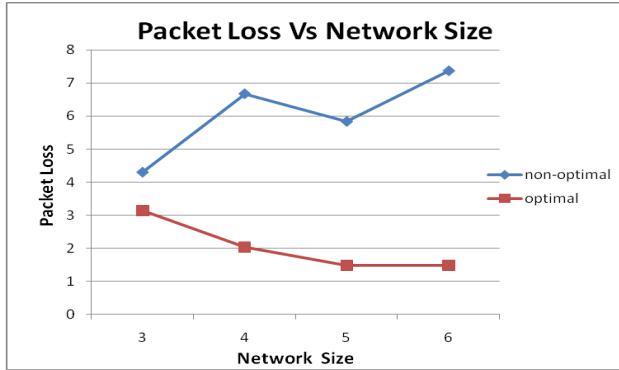


**Fig. 5 Packet loss versus Network Size**

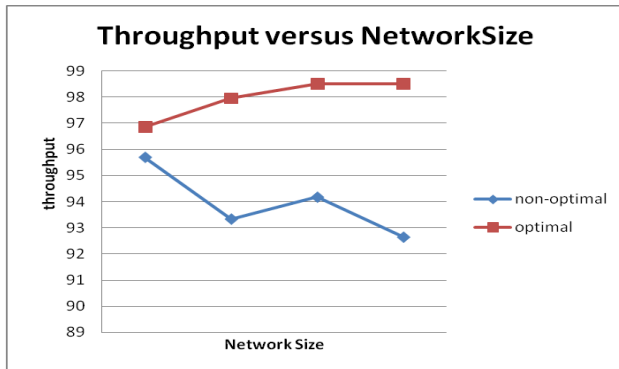


**Fig.6 Throughput versus Network size**

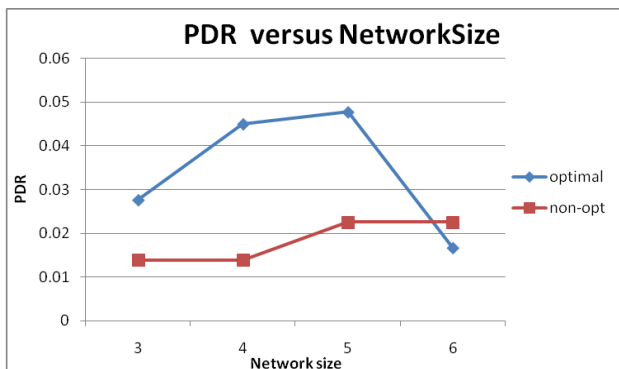

**Fig. 7 PDR versus Network Size**

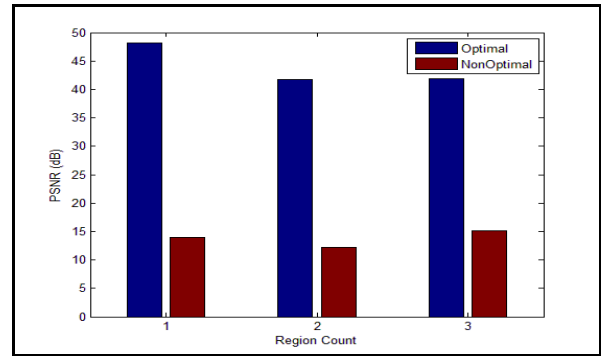

**Fig. 8 PSNR versus Region Count**

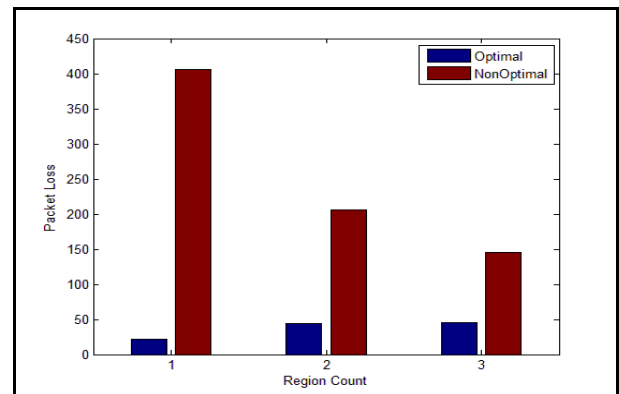

**Fig. 9 Region count versus Packet loss**

## 5. CONCLUSIONS

As it is found in the literature, the problem of transmitting the large size image with high quality over resource constrained WSN is the bottleneck. To solve this problem, we proposed a EEPQR protocol makes use of prioritized region scheduling. The proposed protocol is compared with non optimal transmission scheme. Simulation results show that the proposed mechanism could improve image quality at the receiver with less packet loss and distributing image traffic over network more efficiently as well as high throughput when compared with Non-optimal scheme. As a future work, it can be expected to find alternate path when node failure occurs and consider ETX (Expected Transmission Count metric) and signal strength metrics to choose the path.

## 6. REFERENCES

- [1] I. F. Akyildiz et al., "Wireless sensor networks: a survey", *Computer Networks*, Vol. 38, March 2002, pp. 393-422.
- [2] I. F. Akyildiz, T. Melodia, and K. R. Chowdhury, "A survey on wireless multimedia sensor networks", *Computer Networks*, Vol.51, 2007, pp. 921-960.
- [3] Jamal N, Al-Karaki Ahmed E.Kamal, "Routing Techniques in Wireless Sensor Networks: A survey", Dept of Electrical and Computer Engineering, Iowa State University, Iowa 50011.
- [4] R. Cucchiara, "Multimedia surveillance systems", in: *Proc. of ACM Intl. Workshop on Video Surveillance and Sensor Networks*, Singapore, November 2005.
- [5] Sung-rok Jung, Jeog-hoon Lee, and Byeong-hee Roh, "An Optimized node-Disjoint Multipath Routing

- protocol for Multimedia data Transmission over Wireless Sensor networks”, International Symposium on parallel and Distributed Processing with Applications, 2008.
- [6] M. K. Marina and S. R. Das, “On-demand Multi-path Distance Vector Routing in Ad Hoc Networks,” Proceedings of the IEEE International Conference on Network Protocols, pp. 14 – 23, Nov. 2001
- [7] Juanwei Liu, Jian Chen, Yonghong Kuo, “Multipath Routing Protocol for Networks Lifetime Maximization in Ad-Hoc Networks”, IEEE, 2009.
- [8] R Vidhyapriya, Dr P T Vanathi, “Energy Efficient Adaptive Multipath Routing for Wireless Sensor Networks” IAENG International Journal of Computer Science, 34:1, IJCS\_34\_1\_8.
- [9] Bashir Yahya, Jalel Ben-Othman, “REER: Robust and Energy Efficient Multipath Routing Protocol for Wireless Sensor Networks” Department of Computer Science, PRISM Laboratory University of Versailles Saint Quentin, 2009.
- [10] Md.Abdul hamid, Muhammad mahbub Alam, and Choong Seon Hong, “Design of a QoS-aware Routing Mechanism for Wireless Multimedia Sensor Networks”, IEEE Communications Society, 2008.
- [11] Amir Rastegar Lari<sup>1</sup>, Behzad Akbari<sup>2</sup>, “Network-Adaptive Multipath Video Delivery over Wireless Multimedia Sensor Networks Based on Packet and Path Priority Scheduling”, International Conference on Broadband, Wireless Computing, Communication and Applications, 2010.
- [12] Youssef Charfi , Naoki Wakamiya and Masayuki Murata, “Network –Adaptive image and video transmission in camera based wireless sensor networks”, 2007 IEEE
- [13] Hakan O` ztarak, Kemal Akkaya, Adnan Yazıcı, “Lightweight Object Localization with a Single Camera in Wireless Multimedia Sensor Networks”, IEEE "GLOBECOM" 2009 proceedings.
- [14] Huang Lee, Hattie Dong, Hamid Aghajan, “Robot-Assisted Localization Techniques for Wireless Image Sensor Networks” Proceedings of 3rd Annual IEEE conference on Sensor and Ad Hoc Communications and Networks, Sept.2006 (SECON '06), Vol. 1, pp. 383-392.
- [15] Honggang Wang,Dongming Peng,Wei Wang,Hamid Sharif, Hsiao-Hwa Chen, “Collaborative Image Transmissions Based on Region and Path Diversity in Wireless Sensor Network”, IEEE transactions on Wireless Communications, Vol. 8, Issue 2, pp. 757-765.
- [16] Honggang Wang, Dongming Peng, Wei Wang, Hamid Sharif, “Optimal Rate-Based Image Transmissions via multiple Paths In Wireless Sensor network”, University of Nebraska-Lincoln, IEEE, 2007.
- [17] W.Heizelman, A.channdrakasan, and H.Balakrishnann, “ Energy Efficient Communication Protocol for Wireless Sensor Network”, in the preceding of the Hawaii international conference system sciences, Hawaii, Janaury 2000.
- [18] A.R. Lari, B. Akbari, “Network-Adaptive Multipath Video Delivery over Wireless Multimedia Sensor Networks Based on Packet and Path Priority Scheduling,” IEEE International Conference on Broadband, Wireless Computing, Communication and Applications, 2010.
- [19] H. Yousefi, A. Dabirmoghaddam, K. Mizanian, A.H. Jahangir, “Score Based Reliable Routing in Wireless Sensor Networks,” IEEE 23<sup>rd</sup> International Conference on Information Networking, 2009.
- [20] Qutaiba ibrahem, Ali Akram, Abdulmawjod, Mahmood mohammed, “Simulation and performance study of Wireless sesor network(WSN) using MATLAB, Proceedings of 1st International Conference on , Energy, Power and Control (EPC-IQ), Dec.2010, pp. 307-314.
- [21] MATLAB web site:<http://www.mathworks.com/>
- [22] D. Taubman and M. Marcellin, JPEG2000: Image GOF index Compression Fundamentals, Standards, and Practice. Kluwer, 2001.
- [23] W. Yu, Z. Sahinoglu, and A. Vetro, "Energy efficient jpeg 2000 image transmission over wireless sensor networks," in Global Telecommunications Conference, 2004. GLOBECOM '04. IEEE, 2004.