

A Hybrid Filtering Technique for Eliminating Gaussian Noise and Impulse Noise on Digital Images

R.Pushpavalli

Research Scholar

ECE Department, Pondicherry Engineering College,
Puducherry-14, India

G.Sivarajde

Professor

ECE Department, Pondicherry Engineering College,
Puducherry-14, India

ABSTRACT

A new hybrid filtering technique is proposed to improving denoising process on digital images. This technique is performed in two steps. In the first step, gaussian noise and impulse noise is eliminated using decision based algorithm (DBA). Image denoising process is further improved by an appropriately combining DBA with Adaptive Neuro Fuzzy Inference System (ANFIS) at the removal of gaussian noise and impulse noise on the digital images. Three well known images are selected for training and the internal parameters of the neuro-fuzzy network are adaptively optimized by training. This technique offers excellent line, edge, and fine detail preservation performance while, at the same time, effectively denoising digital images. Extensive simulation results were realized for ANFIS network and different filters are compared. Results show that the proposed filter is superior performance in terms of image denoising and edges and fine details preservation properties.

Keywords

Adaptive Neuro-fuzzy Inference System, Impulse noise, Image denoising, Decision based algorithm.

1. INTRODUCTION

Digital images are often contaminated by impulse noise and gaussian noise during image acquisition and/or transmission over communication channel. Detection and removal of impulse noise from digital images have been of high research interest in the last years. Majority of the existing filtering methods comprise order statistic filters utilizing the rank order information of an appropriate set of noisy input pixels. These filters are usually developed in the general framework of *rank selection filters*, which are nonlinear operators, constrained to output an order statistic from a set of input samples. The difference between these filters is in the information used to decide which order statistic to output. The *standard median filter* (MF) [1]–[3] is a simple rank selection filter and attempts to remove impulse noise from the center pixel of the analysis window by changing the luminance value of the center pixel with the median of the luminance values of the pixels contained within the window. This approach provides a reasonable noise removal performance with the cost of introducing undesirable blurring effects into image details even at low noise densities [4–25].

The great majority of currently available noise filters cannot simultaneously satisfy both of these criteria. The existing filters either suppress the noise at the cost of reduced noise suppression performance. Indeed, Neuro-Fuzzy (NF) systems offer the ability of neural networks to learn from examples and the capability of fuzzy systems to model the uncertainty, which is inevitably encountered when processing noisy signals. Therefore, NF systems may be utilized to design

efficient signal and image processing operators with much less distortion than the conventional operators. A Neuro-Fuzzy System is a flexible system trained by heuristic learning techniques derived from neural networks can be viewed as a 3-layer neural network with fuzzy weights and special activation functions is always interpretable as a fuzzy system uses constraint learning procedures is a function approximation (classifier, controller).

In this paper, Adaptive Neuro-fuzzy Inference System (ANFIS) is presented, which is a fuzzy inference system implemented in the framework of adaptive network. This ANFIS training algorithm is suggested by Jang. By using hybrid learning procedure, the proposed ANFIS can construct an input-output mapping which is based on both human knowledge (in the form of fuzzy if-then rules) and learning. This technique is performed in two steps. In the first step, gaussian noise and impulse noise is eliminated using decision based algorithm (DBA). Image denoising process is further improved by an appropriately combining DBA with Adaptive Neuro Fuzzy Inference System (ANFIS) at the removal of uniform noise and impulse noise on the digital images. Three well known images are selected for training and the internal parameters of the neuro-fuzzy network are adaptively optimized by training. This technique offers excellent line, edge, and fine detail preservation performance while, at the same time, effectively enhancing digital images. Extensive simulation results were realized for ANFIS network and different filters are compared.

The rest of the paper is organized as follows. Section II explains the structure of the proposed operator and its building blocks. Section III discusses the application of the proposed operator to the test images. Results of the experiments conducted to evaluate the performance of the proposed operator and comparative discussion of these results are also presented in this Section IV, which is the final section, presents the conclusions and remarks.

2. PROPOSED OPERATOR

Fig. 1 shows the structure of the proposed impulse noise removal operator. The proposed filtering technique is obtained by appropriately combining and Decision Based Algorithm (DBA) and a neuro-fuzzy network. The proposed filter is obtained by an appropriately combining output images from decision based algorithm, corrupted images and neuro-fuzzy network. Learning and understanding aptitude of the network congregate information from these two image data to compute output of the system which is equal to the restored value of the noisy input pixel. The neuro-fuzzy network utilizes the information from the median filter, the edge detector and the noisy input image to compute the output of the system, which is equal to the restored value of the noisy input pixel. The decision based algorithm is discussed in section 2.1. Section

2.2 presents the neuro-fuzzy network and section 2.3, 2.4 and 2.5 discuss the neuro-fuzzy training, testing conventional filtering procedure respectively.

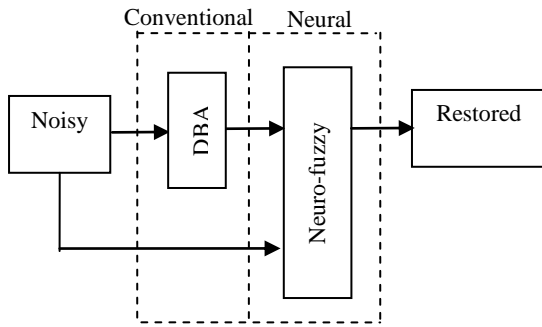


Fig.1 Proposed Hybrid Filter

2.1 Decision Based Algorithm

The filtering technique proposed in this paper employs a decision mechanism to detect the presence of impulse noise and uniform noise on the test image. The pixels inside the sliding window are identified as corrupted or not. If the pixel is corrupted, based on the type of noise, the corrupted central pixel is replaced by either median filter or nonlinear mean filter. Median filter is defined as

$$MF = [\text{med}\{F(i, j)\}], (i, j) \in S_{mn} (s, t) \in S_{mn} \quad (2.1)$$

where, MF represents median filter, $F(i, j)$ represents processing pixel, S_{mn} represents the filtering window. Mean filter simply computes the average of pixels within the filtering window. So mean filter is defined as

$$MF_{avg} = [\text{mean}\{F(i, j)\}], (i, j) \in S_{mn} (s, t) \in S_{mn} \quad (2.1.2)$$

where, MF_{avg} represents average filter, $F(i, j)$ represents processing pixel, S_{mn} represents the filtering window. This filter is a combination of statistics and average. It is very useful for denoising if image is corrupted with impulse noise and gaussian noise. Pixel inside the window is separated as impulse noise and remaining pixels. The remaining pixels (without impulse noise) inside the filtering window are arranged in ascending order and average value is calculated for filtering.

Consider an image of size $M \times N$ having 8-bit gray scale pixel resolution. The proposed filtering algorithm as applied on noisy image is described in steps as follows:

Step 1) A two-dimensional square filtering window of size 3×3 is slid over the noisy image.

Step 2) As the window move over the noisy image, at each point the central pixel inside the window is checked whether the pixel is corrupted by impulse noise or not.

Step 3) If it is corrupted by impulse noise, then the central pixel is replaced by median pixel value.

Step 3) If the central processing pixel within the moving window is detected as an uncorrupted pixel, the pixels within the filtering window are sorted out excluding impulse noise and then nonlinear mean filter is performed on sorted pixels within the moving window.

Then the window is moved to form a new set of values, with the next pixel to be processed at the centre of the window.

This process is repeated until the last image pixel is processed. It may be noted that the filtering is performed by either taking the median or the mean value of the pixels of the filtering window. Moreover, the mean filtering on the remaining pixels (without impulse noise) sample is performed only on processing pixels. As a result, the pixels in the filtered image do not cause any noticeable visual degradation. The performance of the proposed filter is superior to other existing filters in terms of eliminating multiple noise and preserving edges and features of images. This filter output is one of the input for ANFIS training.

2.2 Neuro-Fuzzy Network

The neuro-fuzzy network used in the structure of the proposed hybrid filter acts like a *mixture* operator and attempts to construct an enhanced output image by combining the information from the noisy input image data and ATMF output image data. The rules of mixture are represented by the rules in the rule base of the NF network and the mixture process is implemented by the fuzzy inference mechanism of the NF network. These are described in detail later in this subsection. The neuro-fuzzy network is a first order Sugeno type fuzzy system [49] with two inputs and one output. In neuro-fuzzy network, the Mamdani method is widely accepted for capturing expert knowledge. It allows us to describe the expertise in more intuitive, more human-like manner. However, mamdani-type fuzzy inference entails a substantial computational burden. On the other hand, the Sugeno method is computationally effective and works well with optimization and adaptive techniques, which makes it very attractive in control problems, particularly for dynamic nonlinear systems.

Sugeno-type fuzzy systems are popular general nonlinear modeling tools because they are very suitable for tuning by optimization and they employ polynomial type output membership functions, which greatly simplifies defuzzification process. The input-output relationship of the NF network is as follows.

Let A_1 , A_2 denote the inputs of the neuro-fuzzy network and Y denote its output. The fuzzy inference is performed on the noisy input image pixel by pixel. Each noisy pixel is independently processed by the noisy input image data and an Decision Based Algorithm before being applied to the NF network. Hence, in the structure of the proposed operator, A_1 represents the output data from the noisy input image data and A_2 represents the output data from a Decision Based Algorithm. Each possible combination of inputs and their associated membership functions is represented by a rule in the rule base of the neuro-fuzzy (NF) network. Since the neuro-fuzzy network has two inputs and each input has twenty five membership functions, the rule base contains total of 25 (5^2) rules, which are as follows.

1. If (A_1 is M_{11}) and (A_2 is M_{21}), then

$$Y_1 = MF_1(A_1, A_2)$$

2. If (A_1 is M_{11}) and (A_2 is M_{21}), then

$$Y_2 = MF_2(A_1, A_2)$$

3. If (A_1 is M_{11}) and (A_2 is M_{21}), then

$$Y_3 = MF_3(A_1, A_2)$$

4. If (A_1 is M_{11}) and (A_2 is M_{21}), then

$$Y_4 = MF_4(A_1, A_2)$$

5. If (A_1 is M_{11}) and (A_2 is M_{21}), then

$$Y_5 = MF_5(A_1, A_2)$$

6. If (A_1 is M_{11}) and (A_2 is M_{22}), then

$$Y_6 = MF_6(A_1, A_2)$$

7. If (A_1 is M_{11}) and (A_2 is M_{22}), then

$$Y_7 = MF_7(A_1, A_2)$$

⋮

25. If (A_1 is M_{11}) and (A_2 is M_{25}), then

$$Y_{25} = MF_{25}(A_1, A_2)$$

where M_{ij} denotes the j th membership function of the i th input, Y_k denotes the output of the k th rule, and MF_k denotes the output membership function, with $I = 1, 2; j = 1, 2$ and $k = 1, 2, 3, \dots, 25$. The input membership functions are generalized gaussian membership type. The Gaussian function depends on two parameters σ and c as given by

$$M_{ij}(x, c, \sigma) = e^{-1/2 \left(\frac{x-c}{\sigma} \right)^2} \quad (2.3)$$

and the output membership function are linear

$$MF_{ij} = d_{k1}x_1 + d_{k2}x_2 + d_{k3} \quad (2.4)$$

where x, x_1 and x_2 are formal parameters, and the parameters c and d are constant parameters for input and output membership functions that characterize the shape of the membership functions. The optimal values of these parameters are determined by training the neuro-fuzzy network system.

The optimal number of the membership functions is usually determined heuristically and verified experimentally. A smaller number yields lower complexity and shorter training time, but poor performance. On the other hand, a greater number of yields better performance, but higher complexity and much longer training time. It has been experimentally determined that five membership functions offer a very good balance. The output of the NF network is the weighted average of the individual rule outputs. The weighting factor of each rule is calculated by evaluating the membership expressions in the antecedent of the rule. This is accomplished by first converting the input values to fuzzy membership values by utilizing the input membership functions and then applying the *and* operator to these membership values. The *and* operator corresponds to the multiplication of input membership values. Hence, the weighting factors of the rules are calculated as follows:

$$W_1 = M_{11}(A_1) \cdot M_{21}(A_2)$$

$$W_2 = M_{11}(A_1) \cdot M_{21}(A_2)$$

$$W_3 = M_{11}(A_1) \cdot M_{21}(A_2)$$

$$W_4 = M_{11}(A_1) \cdot M_{21}(A_2)$$

$$W_5 = M_{11}(A_1) \cdot M_{21}(A_2)$$

⋮

$$W_{25} = M_{11}(A_1) \cdot M_{25}(A_2)$$

Once the weighting factors are obtained, the output of the NF network can be found by calculating the weighted average of the individual rule outputs.

$$Y_o = \frac{\sum_{k=1}^{25} W_k Y_k}{\sum_{k=1}^{25} W_k} \quad (2.5)$$

2.3. Training of the Neuro-Fuzzy Network

The internal parameters of the neuro-fuzzy network are optimized by training. Fig. 2 represents the setup used for training. Here, the parameters of the neuro-fuzzy network are iteratively optimized so that its output converges to original noise free image which, by definition, completely removes the noise from its input image. The ideal noise filter is *conceptual* only and does not necessarily exist in reality.

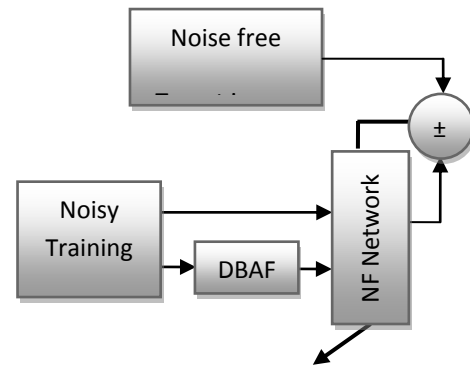


Fig.2 Training of the neuro-fuzzy network

Fig. 3 shows the images used for training. Three different images are used in training, in order to improve the learning capability of neural network. The image shown in Fig. 3(a_{1,2} and 3) are the *original training image*: *Cameraman*, *Baboonlion* and *ship*. The size of the training images is 256 x 256. Fig.(b_{1, 2} and 3) are the *noisy training images* and is obtained by corrupting the original training image by impulse noise of 10% and noise density of gaussian noise with zero mean and $\sigma=200$. The image in Fig.3 (c_{1,2} and 3) are the trained images by neuro-fuzzy network.

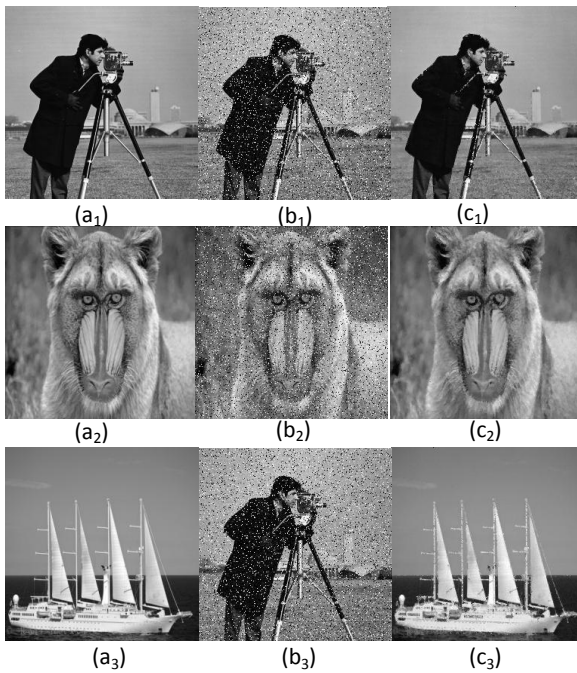


Fig.3 Performance of Training images: (a_{1,2 and 3}) original images, (b_{1,2 and 3}) image corrupted with 10% of impulse noise and gaussian noise with zero mean and $\sigma=200$ and (c_{1, 2 and 3}) trained images

Although the density of the corrupting noise is not very critical regarding training performance, it is experimentally observed that the proposed operator exhibits the best filtering performance when the noise density of the noisy training image is equal to the noise density of the actual noisy input image to be restored. It is also observed that the performance of the proposed operator gradually decreases as the difference between the two noise densities increases. Hence, in order to obtain a stable filtering performance for a wide range of filtering noise densities, very low and very high values for training noise density should be avoided since it is usually impossible to know the actual noise density of a corrupted image in a real practical application. Results of extensive simulation experiments indicate that very good filtering performance is easily obtained for all kinds of images corrupted by impulse noise with a wide range of noise densities provided that the noisy training image has a noise density around 50%. The images in Fig. 3(b) and (a) are employed as the *input* and the *target (desired)* images during training, respectively. The parameters of the NF network are then iteratively tuned. Once the training of the NF network is completed, its internal parameters are fixed and the network is combined with the noisy image data and the DBA output image data to construct the proposed hybrid filter, as shown in Fig. 2.

2.4 Testing of unknown images using trained structure of neural network

The optimized architecture that obtained the best performance for training with three images has 196608 data. The network trained with 10% of impulse noise and gaussian

noise of zero mean with $\sigma=200$ shows superior performance for testing under various noise levels. In order to get effective filtering performance, already existing hybrid filters are trained with image data and tested using equal noise density. But in practical situation, information about the noise density of the received signal is unpredictable one. Therefore; in this paper, the ANFIS architecture is trained using denoised three well known images which are corrupted by adding different noise density levels. Noise density with 0.1 of impulse noise and gaussian noise of zero mean and $\sigma=200$ gave optimum solution for both lower and higher level noise corruption. Therefore images are corrupted with 45% of noise is selected for training. Then the performance error of the given trained data and trained network structure are observed for each network. Among these network structures, the trained network structure with the minimum error level is selected (10^{-3}) and this trained network structures are fixed for testing the received image signal. Also, to ensure faster processing, only the corrupted pixels from test images are identified and processed by the optimized neural network structure. As uncorrupted pixels do not require further processing, they are directly taken as the output.

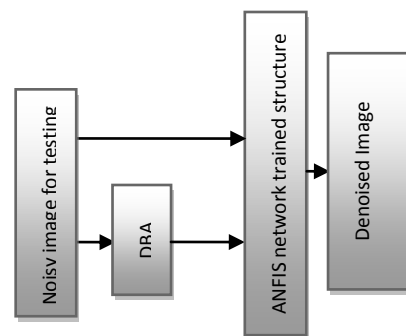


Fig.4 Testing of the images using optimized feed forward adaptive neural network structure

The chosen network has been extensively tested for several images with different level of impulse noise. Fig.4 shows the exact procedure for taking corrupted data for testing the received image signals for the proposed filter. In order to reduce the computation time in real time implementation; in the first stage, new tristate switching median filter is applied on unknown images and then pixels (data) from noisy image and DBA's output is obtained and applied as input for optimized neural network structure for testing; these pixels are corresponding to the pixel position of the corrupted pixels on noisy image. At the same time, noise free pixels from input are directly taken as output pixels. The tested pixels are replaced in the same location on corrupted image instead of noisy pixels. The most distinctive feature of the proposed filter offers excellent line, edge, and fine detail preservation performance and also effectively removes impulse noise and gaussian noise from the image. Usually conventional filters give denoised image output and then these images are enhanced using these conventional outputs as inputs for hybrid filter while these outputs are combined with the network. Since, networks need certain pattern to learn and understand the given data.

2.5. Filtering of the Noisy Image

The noisy input image is processed by sliding the 3x3 filtering window on the image. This filtering window is also the filtering window for Decision Based Algorithm. The window

is started from the upper-left corner of the noisy input image, and moved rightwards and progressively downwards in a *raster scanning* fashion. For each filtering window, the nine pixels contained within the window are first fed to the median filter and the edge detector in the structure. Next, the center pixel of the filtering window and the outputs of the median filter and the edge detector are applied to the appropriate inputs of the NF network. Finally, the restored luminance value for the center pixel of the filtering window is obtained at the output of the NF network by using the fuzzy inference mechanism.

3. RESULTS AND DISCUSSION

The proposed hybrid impulse noise removal operator discussed in the previous section is implemented. The performance of the operator is tested under various noise conditions and on four popular test images from the literature including *Baboon, Lena, Pepper and Rice images*. All test images are 8-bit gray level images. The experimental images used in the simulations are generated by contaminating the original images by impulse noise with an appropriate noise density depending on the experiment. Several experiments are performed on Lena test image to measure and compare the noise suppression and detail preservation performances of all operators. The performances of all operators are evaluated by using the *peak signal-to-noise ratio* (PSNR) criterion, which is defined as

$$PSNR = 10 \log_{10} \left(\frac{255^2}{MSE} \right) \quad (3.1)$$

where *MSE* is the mean squared error and is defined as

$$MSE = \frac{1}{MN} \sum_{i=1}^M \sum_{j=1}^N |x(i, j) - y(i, j)|^2 \quad (3.2)$$

Here, M and N represents the number of rows and columns of the image $x(i, j)$ and $y(i, j)$ represents the original and the restored versions of a corrupted test image, respectively. The averages of these values are then taken as the representative PSNR value for that experiment. The experimental procedure to evaluate the performance of a given operator is as follows: For each noise density step, the four test images are corrupted by Noise density with 0.1 of impulse noise and gaussian noise of zero mean and $\sigma=200$. Finally, the overall experimental procedure is individually repeated for each operator. Since all experiments are related with noise and noise is a random process, every realization of the same experiment yields different results even if the experimental conditions are the same. Therefore, each individual filtering experiment presented in this paper is repeated for different PSNR values for the same experiment are summarized in Table1.

For comparison, the corrupted experimental images are also restored by using several conventional and state-of-the-art impulse noise removal operators including an Decision Based Algorithm (DBA), Feed forward back propagation algorithm (FFBPA) and the proposed neuro-fuzzy filtering technique are subjectively evaluated on Lena test image in Fig.4 and graphically illustrated in Fig.5. These filters are representative implementations of different approaches to the impulse noise filtering problem. Fig.4 illustrates the performance of proposed filter and compares with that of the different filtering algorithm in terms of PSNR when applied on Lena

image contaminated with noise densities. The new nonlinear filter outperforms the improved decision making algorithm.

Table.1

PSNR values obtained using proposed filter and compared with different filtering techniques on Lena image corrupted with various densities of impulse noise

Noise		DBA	FFBPA	Proposed NFF
Gaussian noise	Impulse noise			
100	10%	28.9294	29.0134	29.3465
200	10%	28.5258	28.8684	29.1054
300	10%	28.2816	28.6561	28.9477
400	10%	28.0382	28.4084	28.7300
500	10%	27.9112	27.9440	28.4533
600	10%	27.6408	27.7532	28.0557
700	10%	27.4216	27.5891	27.9396



Fig.4 Subjective performance illustration of the proposed filtering technique compared with existing technique: (a) Original Lena image, (b) Lena image Corrupted by 10% impulse noise and gaussian noise with zero mean and $\sigma=200$, (c) Restored by DBA, (d) Restored by FFBPA (e) Restored by the proposed algorithm

TABLE I
PSNR VALUES OBTAINED USING DIFFERENT FILTERING
TECHNIQUE ON LENA IMAGE CORRUPTED WITH VARIOUS
DENSITIES OF IMPULSE NOISE

Noise		DBA	Neural based filter	The proposed filter
Gaussian noise	Impulse noise			
100	10%	28.9294	29.0134	29.3465
200	10%	28.5258	28.8684	29.1054
300	10%	28.2816	28.6561	28.9477
400	10%	28.0382	28.4084	28.7300
500	10%	27.9112	27.9440	28.4533
600	10%	27.6408	27.7532	28.0557
700	10%	27.4216	27.5891	27.9396

In order to prove the effectiveness of this filter, existing filtering techniques are experimented and compared with the proposed filter for visual perception and subjective evaluation on Lena image including the proposed filter in Fig.4.

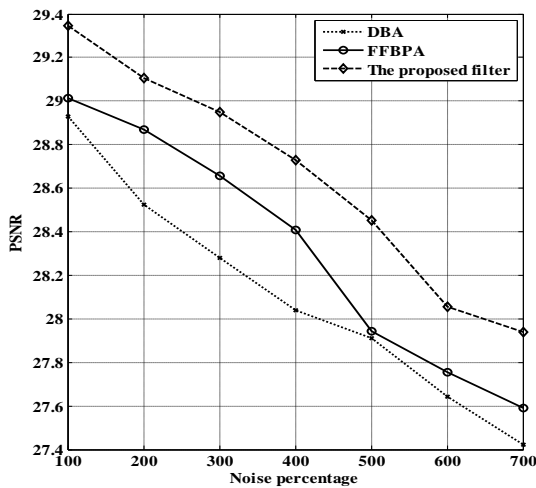


Fig.5 Performance of PSNR for proposed filter compared with different filtering technique on Lena image

The PSNR performance explores the quantitative measurement. In order to check the performance of the feed forward neural network, percentage improvement (PI) in PSNR is also calculated for performance comparison between conventional filters and proposed neural filter for Lena image and is summarized in Table 2. This PI in PSNR is calculated by the following equation 3.3.

$$PI = \left[\frac{PSNR_{CF} - PSNR_{NF}}{PSNR_{CF}} \times 100 \right] \tag{3.3}$$

where PI represents percentage in PSNR, PSNR_{CF} represents PSNR for conventional filter and PSNR_{NF} represents PSNR values for the designed neural filter.

Table 2
Percentage improvement in PSNR obtained on Lena image corrupted with different level of impulse noise

Noise		Proposed filter	DBA	PI for the proposed filter
Gaussian noise	Impulse noise			
100	10%	29.3465	28.9294	1.4418
200	10%	29.1054	28.5258	1.4418
300	10%	28.9477	28.2816	2.3552
400	10%	28.7300	28.0382	2.4673
500	10%	28.4533	27.9112	1.9422
600	10%	28.0557	27.6408	1.5010
700	10%	27.9396	27.4216	1.8890

The summarized PSNR values in Table 4 for the proposed neural filter appears to perform well for human visual perception when images. These filters performance are better for quantitative measures when images are corrupted up to 80% of impulse noise. PI is graphically illustrated in Fig.8.

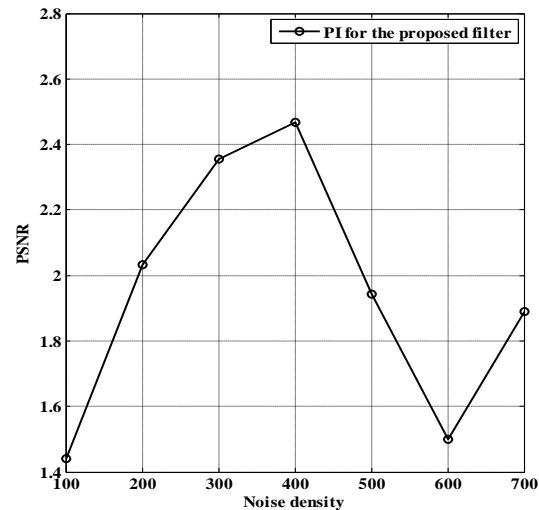


Fig.8 PI in PSNR obtained on Lena image for the proposed filter corrupted with various densities of mixed impulse noise

Table II lists the variations of the PSNR values of the operators as a function of noise density for proposed filtering image technique on different test images. The proposed operator demonstrates the best filtering performance of all. Its PSNR values are significantly higher than those of the other filters for all noise densities. Fig.6 detects the subjective performance of proposed filter on different test images. The proposed filter can be seen to have eliminated the impulse noise completely. Further, it can be observed that the proposed filter is better in preserving the edges and fine details than the other existing filtering algorithm. The experiments are especially designed to reveal the performances of the operators for different image properties and noise conditions.

Table II
Performance of PSNR for proposed hybrid neuro-fuzzy filter for different images corrupted with various noise densities

PSNR					
Gaussian noise	Impulse noise	Baboon	Lena	Pepper	Rice
100	10%	24.56	29.34	33.56	31.86
200		24.01	29.10	33.20	31.54
300		23.78	28.94	32.97	31.21
400		23.55	28.73	32.66	30.83
500		23.10	28.45	32.20	30.54
600		22.77	28.05	31.98	30.22
700		22.31	27.93	31.65	29.43



Fig.6 Performance of test images: (a_{1,2} and a₄) original images,(b_{1,2} and b₄) images corrupted with 10% of impulse noise and gaussian noise with $\sigma=200$ and (c_{1, 2} and c₄) images enhanced by proposed filter

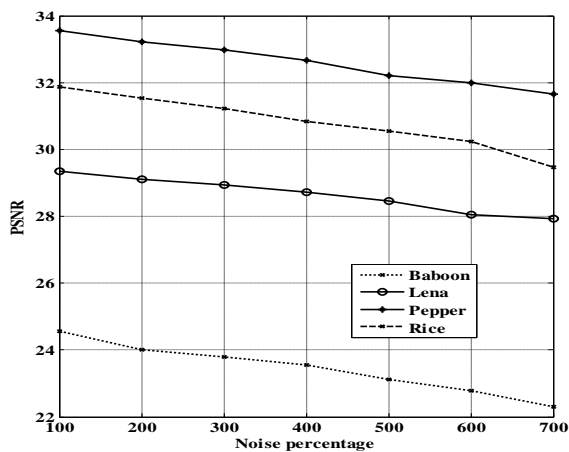


Fig.7 Performance of PSNR for the proposed filter on different test images

Fig.7 presents the noise-free, noisy, and filtered images for objective evaluation. Four different test images corrupted with 10% impulse noise and gaussian noise with $\sigma=200$ are used to illustrate the efficacy of the proposed filter. HNF filter is found to have eliminated the impulse noise completely while preserving the image features quite satisfactorily. It can be seen that this filtered images are more pleasant for visual perception.

V. CONCLUSION

A neuro-fuzzy filter is described in this paper. The proposed filter is seen to be quite effective in eliminating the gaussian noise and impulse noise; in addition, the proposed filter preserves the image boundaries and fine details satisfactorily. The efficacy of the proposed filter is illustrated by applying the filter on various test images contaminated by different levels of noise. This filter outperforms the existing median based filter in terms of qualitative and quantitative measures. In addition, the hybrid filtered images are found to be pleasant for visual perception, since the filter is robust against the impulse noise and gaussian noise while preserving the image features intact. Further, the proposed filter is suitable for real-time implementation, and applications because of its adaptive in nature. The proposed Hybrid filter, developed using MATLAB functions, is flexible, accurate than existing filtering algorithm and its scope for better real-time applications.

REFERENCES

- [1] J. W. Tukey, "Nonlinear (nonsuperposable) methods for smoothing data", in *Proc. Conf. Rec. EASCON*, 1974, p. 673.
- [2] *Exploratory Data Analysis*. Reading, MA: Addison-Wesley, 1977.
- [3] S. E. Umbaugh, *Computer Vision and Image Processing*. Upper Saddle River, NJ: Prentice-Hall, 1998.
- [4] O. Yli-Harja, J. Astola, and Y. Neuvo, "Analysis of the properties of median and weighted median filters using threshold logic and stack filter representation", *IEEE Trans. Signal Processing*, vol. 39, pp. 395–410, Feb. 1991.
- [5] S.-J. Ko and Y. H. Lee, "Center weighted median filters and their applications to image enhancement", *IEEE Trans. Circuits Syst.*, vol. 38, pp. 984–993, Sept. 1991.
- [6] B. Jeong and Y. H. Lee, "Design of weighted order statistic filters using the perception algorithm", *IEEE Trans. Signal Processing*, vol. 42, pp. 3264–3269, Nov. 1994.
- [7] T. Chen, K.-K. Ma, and L.-H. Chen, "Tri-state median filter for image denoising", *IEEE Trans. Image Processing*, vol. 8, pp. 1834–1838, Dec. 1999.
- [8] T. Chen and H. R. Wu, "Impulse noise removal by multi-state median filtering", in *Proc. ICASSP'2000*, Istanbul, Turkey, 2000, pp. 2183–2186.
- [9] T. Chen and H. R. Wu, "Space variant median filters for the restoration of impulse noise corrupted images", *IEEE Trans. Circuits Syst. II*, vol. 48, pp. 784–789, Aug. 2001.
- [10] "Adaptive impulse detection using center-weighted median filters," *IEEE Signal Processing Lett.*, vol. 8, pp. 1–3, Jan. 2001.
- [11] "Application of partition-based median type filters for suppressing noise in images", *IEEE Trans. Image Processing*, vol. 10, pp. 829–836, June 2001.

- [12] M. E. Yüksel and E. Besdok, "A simple neuro-fuzzy impulse detector for efficient blur reduction of impulse noise removal operators for digital images", *IEEE Trans. Fuzzy Syst.*, vol. 12, no. 6, pp. 854–865, Dec. 2004.
- [13] M. E. Yüksel, A. Bas, türk, and E. Besdok, "Detail preserving restoration of impulse noise corrupted images by a switching median filter guided by a simple neuro-fuzzy network," *EURASIP J. Appl. Signal Process.*, vol. 2004, no. 16, pp. 2451–2461, 2004.
- [14] T. Chen, K.-K. Ma, and L.-H. Chen, "Tri-state median filter for image denoising," *IEEE Trans. Image Process.*, vol. 8, no. 12, pp. 1834–1838, Dec. 1999.
- [15] D. Florencio and R. Schafer, "Decision-based median filter using local signal statistics", presented at the SPIE Int. Symp. Visual Communications Image Processing, Chicago, IL, Sept. 1994.
- [16] T. Sun and Y. Neuvo, "Detail-preserving median based filters in image processing", *Pattern Recogn. Lett.*, vol. 15, no. 4, pp. 341–347, 1994.
- [17] Z. Wang and D. Zhang, "Progressive switching median filter for the removal of impulse noise from highly corrupted images," *IEEE Trans. Circuits Syst.*, vol. 46, pp. 78–80, Jan. 1999.
- [18] S. Zhang and M. A. Karim, "A new impulse detector for switching median filters", *IEEE Signal Processing Lett.*, vol. 9, pp. 360–363, Nov. 2002.
- [19] R.Pushpavalli and E.Srinivavsan, " Multiple Decision Based Switching Median Filtering for Eliminating Impulse Noise with Edge and Fine Detail Preservation Properties" International conference on Signal Processing, CIT at Coimbatore, Aug. 2007.
- [20] E.Srinivavsan and R.Pushpavalli, " Multiple Decision Based Switching Median Filtering for Eliminating Impulse Noise with Edge and Fine Detail Preservation Properties" International conference on Signal Processing, CIT at Coimbatore, Aug. 2007.
- [21] R.Pushpavalli and G.Sivaradje, "Nonlinear Filtering Technique for Preserving Edges and Fine Details on Digital Image", *International Journal of Electronics and Communication Engineering and Technology*, January 2012, 3, (1),pp29-40.
- [22] R.Pushpavalli and E.Srinivasan, "Decision based Switching Median Filtering Technique for Image Denoising", *CiiT International journal of Digital Image Processing*, Oct.2010, 2, (10), pp.405-410.
- [23] R. Pushpavalli, E. Srinivasan and S.Himavathi, "A New Nonlinear Filtering technique", 2010 International Conference on Advances in Recent Technologies in Communication and Computing, ACEEE, Oct. 2010, pp1-4.
- [24] R. Pushpavalli and G.Sivaradje, "New Tristate Switching Median Filter for Image Enhancement" *International Journal of Advanced research and Engineering Technology*, January-June 2012, 3, (1), pp.55-65.
- [25] Nguyen Minh Thanh and Mu-Song Chen, "Image Denoising Using Adaptive Neuro-Fuzzy System", *IAENG International Journal of Applied Mathematics*, February 2007.
- [26] R.Pushpavalli, G.Shivaradje, E. Srinivasan and S.Himavathi, " Neural Based Post Processing Filtering Technique For Image Quality Enhancement", *International Journal of Computer Applications*, January-2012.
- [27] M. E. Yüksel and E. Besdok, "A simple neuro-fuzzy impulse detector for efficient blur reduction of impulse noise removal operators for digital images", *IEEE Trans. Fuzzy Syst.*, vol. 12, no. 6, pp. 854–865, Dec. 2004.